

**MID SUFFOLK DISTRICT COUNCIL**  
 131, High Street, Needham Market, IP6 8DL  
 Telephone : 01449 724500  
 email: customerservice@csduk.com  
 www.midsuffolk.gov.uk



SCALE 1:500

Reproduced by permission of  
 Ordnance Survey on behalf of HMSO.  
 © Crown copyright and database right 2016  
 Ordnance Survey Licence number 100017810

Date Printed : 08/07/2016



Title: Constraints  
 Reference: 2902 & 2903/16  
 Site: Rampant Horse  
 Needham Market

CONSERVATION AREA  
 LISTED BUILDINGS




**MID SUFFOLK DISTRICT COUNCIL**  
 131, High Street, Needham Market, IP6 8DL  
 Telephone : 01449 724500  
 email: customerservice@csduk.com  
 www.midsuffolk.gov.uk

↑ N  
 SCALE 1:1000  
 Reproduced by permission of  
 Ordnance Survey on behalf of HMSO.  
 © Crown copyright and database right 2016  
 Ordnance Survey Licence number 100017810

## MEMBER REFERRAL TO COMMITTEE

Planning application reference	2903/16 – Rampant Horse Inn, Coddendam Road, Needham Market, IP6 8AU
Parish	Needham Market
Member making request	Mike Norris and Wendy Marchant (joint ward members for Needham Market & Badley Ward)
13.3 Please describe the significant policy, consistency or material considerations which make a decision on the application of more than local significance	<p>1. Proposal is contrary to Local Plan Policy H16 (Protecting existing residential amenity), in respect of existing residential properties in the immediate area.</p> <p>2. Also contravenes Policy SB2 (Development appropriate to its setting).</p> <p>3. Also contravenes Policy HB3 (Conversions and alterations of historic buildings). The Rampant Horse Inn is Grade II listed and within a Conservation Area, as are nos. 1 to 7 Coddendam Road.</p>
13.4 Please detail the clear and substantial planning reasons for requesting a referral	<p>The proposal would have an overbearing effect on the amenity of the residents of no. 3 Coddendam Road, the rear wall of the proposed two-storey extension being only approximately one metre from their boundary, and including two opening windows in the single storey element. A tall extractor flue is also proposed to be installed, which would be visible for some distance, create noise, and emit fumes over the adjacent residents' amenity areas and gardens.</p> <p>The scale and mass of the proposed extension (the ridge height of the two-storey element being 0.9 metres - approximately 3 feet, higher than that of the existing barn) is out of keeping with adjacent residential properties, which are of historic interest, and the roof covering proposed of 'Black Profiled Metal Sheeting' is not consistent with existing properties.</p>
13.5 Please detail the wider District and public interest in the application	Please see the response to 13.3 above.
13.6 If the application is not in your Ward please describe the very significant impacts upon your Ward which might arise from the development	
13.7 Please confirm what steps you have taken to discuss a referral to committee with the case officer	<p>We have both as ward members discussed the original application, 2902/16, and this revised application with the case officer, Lindsey Wright, who was awaiting a response from Environmental Health and Heritage.</p> <p>Should the decision be that the case officer is minded to refuse the application we are content that the application is determined at delegated officer level.</p>

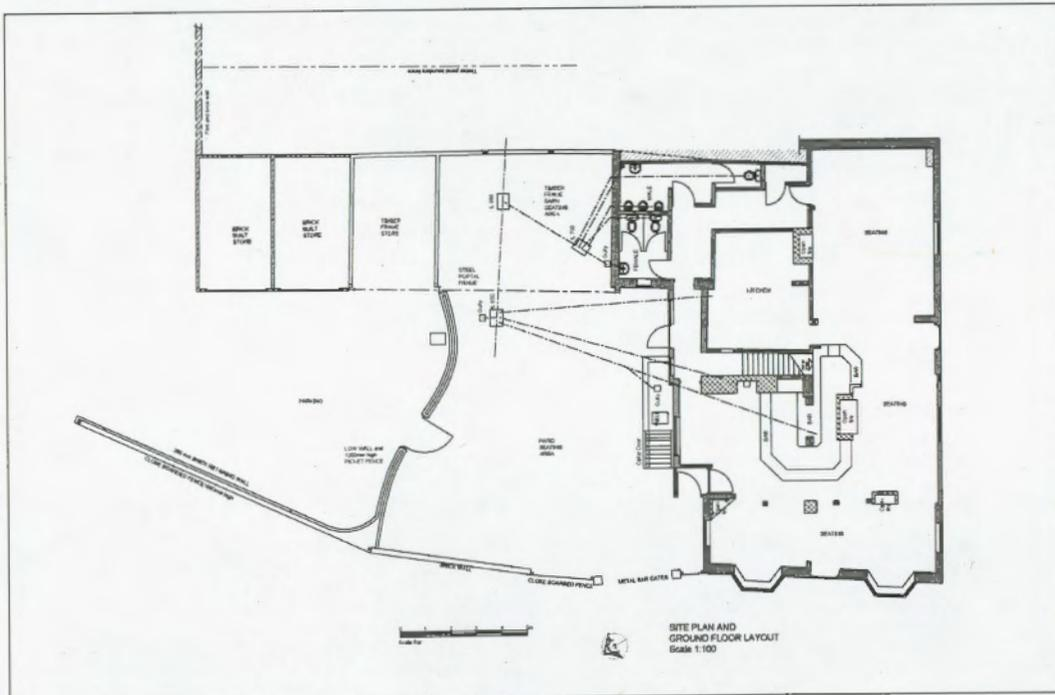

Site Plan & Existing Ground Floor Layout Scale 1:500



Location Plan Scale 1:1250



Block Plan Scale 1:500

No. Date Revision  
Revisions

**HOLLINS**  
Architectural Surveyors &  
Planning Consultants

4, Market Hill  
Framlingham  
Suffolk  
IP13 9BJ  
Telephone 01728 729919  
Fax 01728 729947  
E mail a.hollins@hollins.co.uk  
Website www.hollins.co.uk

Client  
MR ALEC WILLIAMSON

Site  
RAMPANT HORSE PUBLIC HOUSE  
NEEDHAM MARKET  
SUFFOLK

Project  
PROPOSED REFURBISHMENT  
AND EXTENSION

Details  
LOCATION PLAN  
BLOCK PLAN  
SITE PLAN

Scale 1:1250/500/100 @ A1

Date June 2016

Drawn by KA

Drawing number  
**16-015 001**


The owner or copyright in this drawing must not be liable to any person for any loss or damage, however caused, in connection with the use of this drawing.

Rampant Horse Public House  
Needham Market

**PLANNING**


143

144

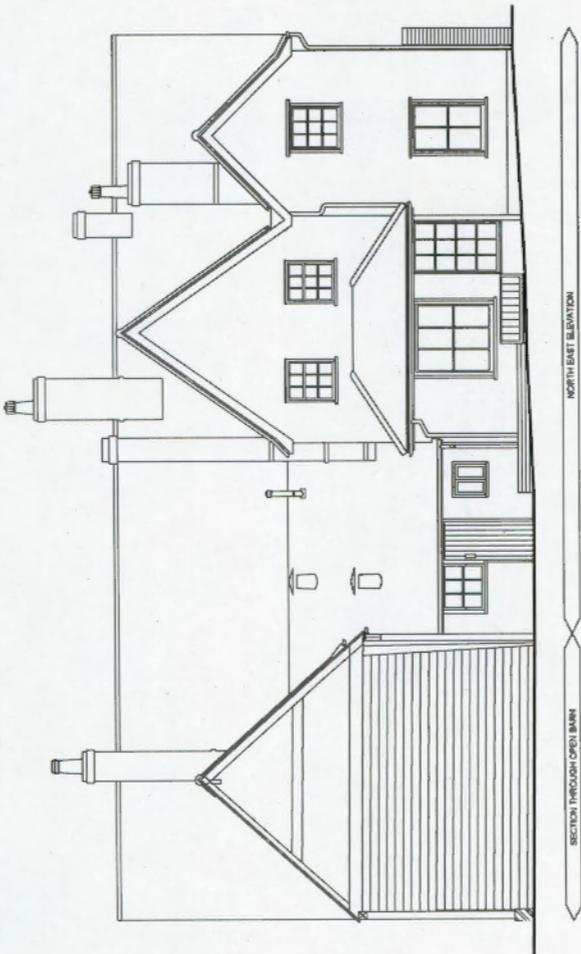

NORTH EAST ELEVATION

SECTION THROUGH OPEN BARN

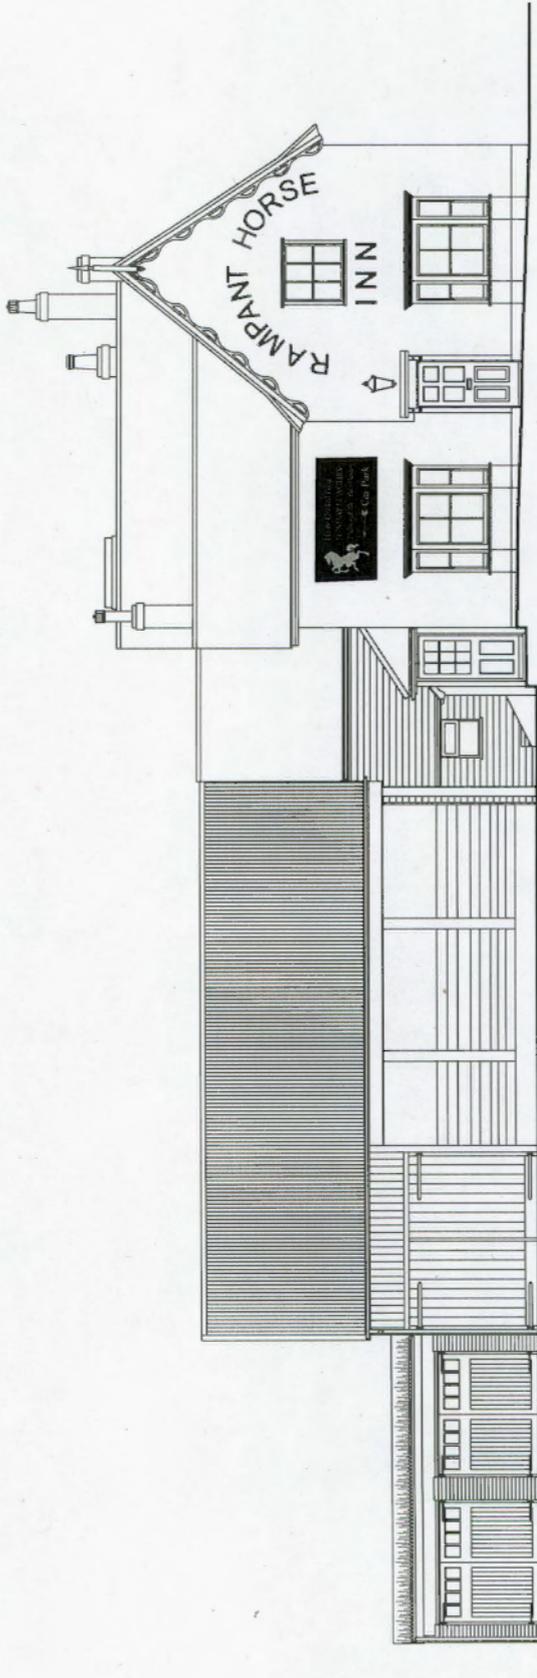


NORTH WEST ELEVATION

CLOSED AND OPEN BARN TO BE DEVELOPED

EXISTING DAMAGES TO BE REMOVED


Project <b>REFURBISHMENT &amp; EXTENSION</b>		Site <b>RAMPANT HORSE STATION ROAD NEEDHAM MARKET</b>		Hollins Architectural Services Planning Consultants 17, Church St Needham Market, Suffolk IP11 2JY Phone: 01473 810000 Fax: 01473 810001		State 150 @ A1		Date Feb 2015		Drawing No. 16-015-202	
Client Mr A WILLIAMSON		Project NORTH EAST & NORTH WEST COURTYARD ELEVATIONS EXISTING		Project RAMPANT HORSE STATION ROAD NEEDHAM MARKET		State 150 @ A1		Date Feb 2015		Drawing No. 16-015-202	
<b>PLANNING</b>											

Rampant Horse  
Public House

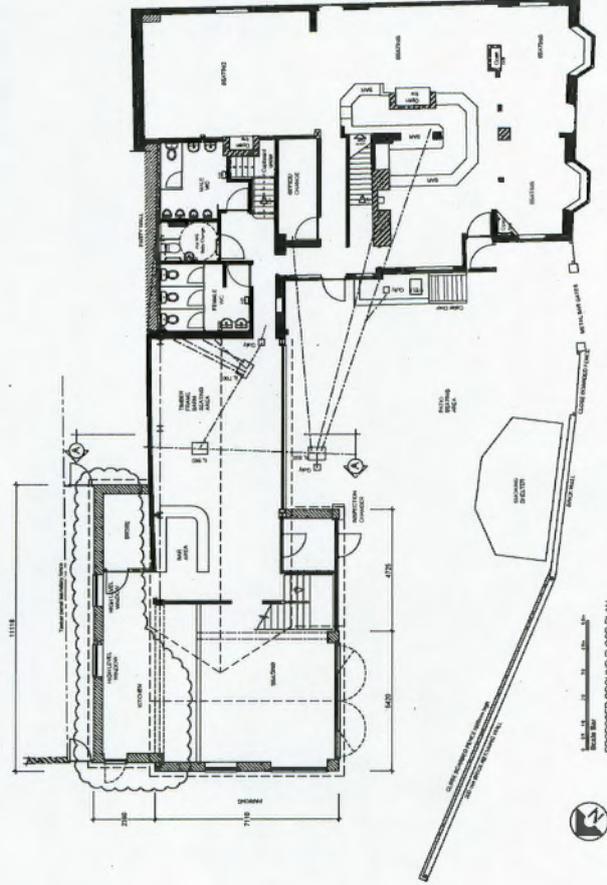


**PROPOSED GROUND FLOOR PLAN**

**PROPOSED MATERIALS**  
 New extension walls in Fluted Glass Block with  
 show near top corner area.  
 All new roofs and existing timber beam  
 covered with black profiled metal sheathing.  
 Windows, doors and screens in dark grey  
 aluminium with double glazing and insulated  
 panes across floor levels and in gable  
 openings.

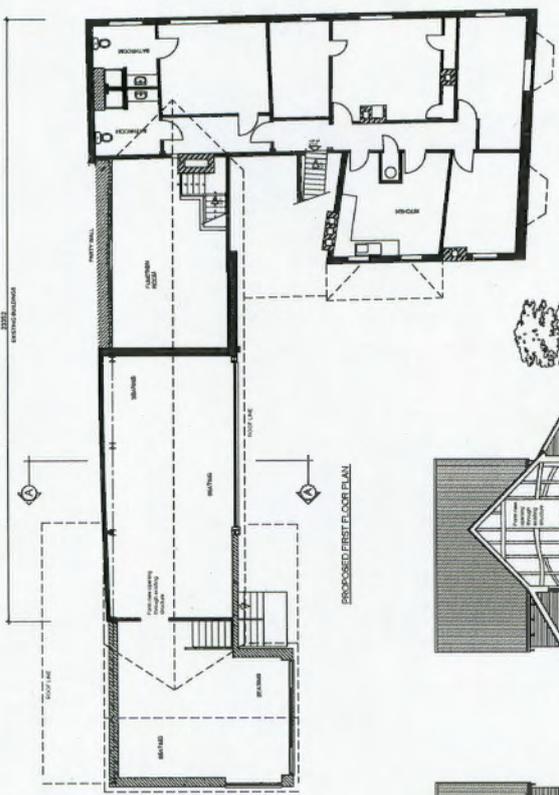

**PROPOSED FIRST FLOOR PLAN**

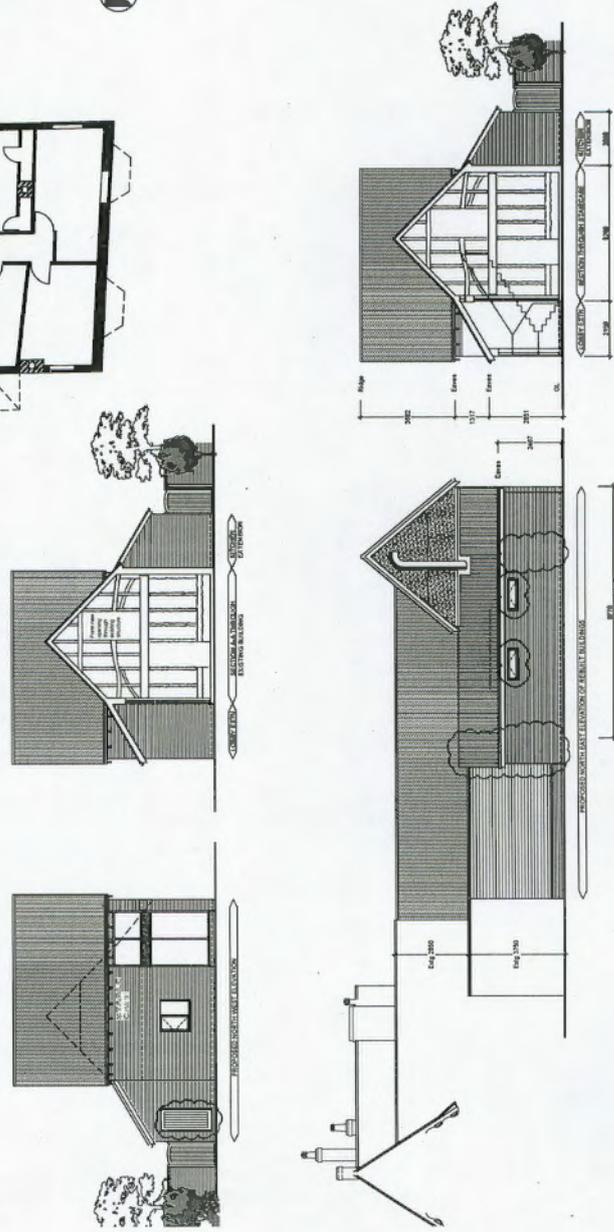

<p>PROJECT: EXTENSION &amp; REFURBISHMENT                  CLIENT: MR ALEC WILLIAMSON</p>		<p>SITE:                  RAMPANT HORSE PUBLIC HOUSE                  NEEDHAM MARKET</p>		<p>DATE: 1:100 @ A1                  PERIOD: Mar 2016                  DRAWN: KA                  PROJECT NO: 18/015-203 C                  FILE NO: 18/015-203 C</p>	
<p>ARCHITECT:                  HOLLINS                  ARCHITECTS AND INTERIORS                  44 BUCKLEBURY                  NEEDHAM MARKET, NEEDHAM, NORFOLK, NR13 7JY                  TEL: 01493 822888 FAX: 01493 731927                  WWW.HOLLINS.CO.UK</p>		<p>PLANNING                  A 21/07/14 DASHWOODS APPROVED                  B 26/09/14 SOUTH EAST DORSET LOCAL AUTHORITY APPROVED                  C 10/09/14 SOUTH EAST DORSET LOCAL AUTHORITY APPROVED</p>		<p>PLANNING                  A 21/07/14 DASHWOODS APPROVED                  B 26/09/14 SOUTH EAST DORSET LOCAL AUTHORITY APPROVED                  C 10/09/14 SOUTH EAST DORSET LOCAL AUTHORITY APPROVED</p>	

Rampant Horse  
 Needham Market

## Consultee Comments for application 2902/16

### Application Summary

Application Number: 2902/16

Address: Rampant Horse Inn, Coddendam Road, Needham Market, Ipswich, IP6 8AU

Proposal: Erection of extension to the rear elevation, to provide additional dining and caf? space.

Alteration to rear projection.

Case Officer: Lindsey Wright

### Consultee Details

Name: Mr kevin hunter

Address: town council office, school street, needham market IP6 8BB

Email: clerk@needhammarketc.f9.co.uk

On Behalf Of: Needham Market Town Clerk

### Comments

Needham Market Town Council sincerely welcomes the proposed investment in what is an important and historical building and therefore supports approval of the application.

**From:** Clerk (Needham Market Town Council) [mailto:clerk@needhammarkettc.co.uk]  
**Sent:** 22 September 2016 11:24  
**To:** Planning Admin  
**Cc:** richardcampbell1@hotmail.co.uk; Martin Spurling; xyinhope@icloud.com  
**Subject:** Planning Ref: 2903/16. Rampant Horse Inn, Needham Market

Dear Sir/Madam,

As the application is not included for submission of comments on your website, I am submitting Needham Market Town Council's comments by this email.

The Town Council initially supported the application but is aware now the extent of proposed development includes the garden of the residential property 1 Coddendam Road.

The Town Council now recommends the Planning Authority rejects the application for the following reasons:

1. The spread of the proposed business development onto the garden land of the residential property 1 Coddendam Road is inappropriate.
2. The proposed development includes the installation of a large industrial extractor which would be located in close proximity to neighbouring residential properties causing substantial noise and air pollution.
3. The proposal includes windows which would be in close proximity to the boundary of 1 Coddendam Road and thereby significantly impacts on the privacy of neighbouring residential properties, resulting in loss of amenity and the demise of neighbouring residents rights to reasonable enjoyment of their property.

The Town Council implores the Planning Authority to work with the applicant to redesign the proposal to eliminate the grounds for the above objections.

Kind regards,

Kevin Hunter  
Town Clerk  
Needham Market Town Council  
Tel. (01449) 722246

**From:** Nathan Pittam  
**Sent:** 28 July 2016 09:19  
**To:** Planning Admin  
**Subject:** 2902/16/FUL. EH - Land Contamination.

**M3 : 181823**

**2902/16/FUL. EH - Land Contamination.**

**Rampant Horse Inn, Coddendam Road, Needham Market, IPSWICH, Suffolk, IP6 8AU.**

**Erection of extension to the rear elevation, to provide additional dining and café space. Alteration to rear projection.**

Many thanks for your request for comments in relation to the above application. I have reviewed the application and am pleased to confirm that I have no objections to raise with respect to land contamination. I would only request that we are contacted in the event of unexpected ground conditions being encountered during construction and that the developer is made aware that the responsibility for the safe development of the site lies with them.

Regards

Nathan

Nathan Pittam BSc. (Hons.) PhD  
Senior Environmental Management Officer  
Babergh and Mid Suffolk District Councils – Working Together  
t: 01449 724715 or 01473 826637  
w: [www.babergh.gov.uk](http://www.babergh.gov.uk) [www.midsuffolk.gov.uk](http://www.midsuffolk.gov.uk)

**From:** Nathan Pittam  
**Sent:** 12 September 2016 09:03  
**To:** Planning Admin  
**Subject:** 2903 / 16 - AMENDED PLANS. EH, Other Issues

**M3 : 183708**

**2903 / 16 - AMENDED PLANS. EH, Other Issues**

**Rampant Horse Inn, Coddendam Road, Needham Market, IPSWICH, Suffolk, IP6 8AU.**

**Erection of extension to the rear elevation, to provide additional dining and, café space. Alterations to and internal reconfiguration of existing rear projection**

Many thanks for your request for comments in relation to the above application. I have viewed the application and the previous incarnations of the application and would maintain the advice that my colleague, David Harrold, has already provided.

*"Thank you for consulting me on the above application to erect an extension at the rear of the Rampant Horse Inn.*

*I do not have any objection to the proposed development but would recommend that detail of any new cooking ventilation and filtration equipment is submitted for prior approval before commencement of the development.*

*I would recommend the following condition:*

*"Suitable ventilation and filtration equipment shall be installed to suppress and disperse odour from cooking operations on the premises. The equipment shall be effectively operated and maintained in accordance with manufacturer's instructions for as long as the proposed use continues. Such a system should be suitably attenuated and isolated to prevent noise from having an adverse impact on neighbouring dwellings.*

*Details of the equipment shall be submitted to and approved by the Local Planning Authority prior to commencement of use. These details shall include outlet height which in general should be at least 1 metre above the ridge height of the nearest building.*

*The details should also include precise acoustic specifications as well as a noise assessment, to include details of existing background noise levels during the typical times of operation, in accordance with the methodology as given in British Standard 4142; 2014."*

*Reason: To prevent adverse impact from noise and odour on the quality of life and health of occupiers in neighbouring residential premises."*

Regards

Nathan

Nathan Pittam BSc. (Hons.) PhD  
Senior Environmental Management Officer  
Babergh and Mid Suffolk District Councils -- Working Together  
t: 01449 724715 or 01473 826637  
w: [www.babergh.gov.uk](http://www.babergh.gov.uk) [www.midsuffolk.gov.uk](http://www.midsuffolk.gov.uk)





## HERITAGE COMMENTS

**Application No.:** 2903/16 & 2902/16

**Proposal:** Erection of extension to the rear elevation, to provide additional dining and café space. Alterations to and internal reconfiguration of existing rear projection.

**Address:** Rampant Horse Inn, Coddendam Road, Needham Market IP6 8AU

**Date:** 21<sup>st</sup> September 2016

## SUMMARY

1. The Heritage Team considers that the proposal would cause no harm to any designated heritage asset, because the effect on the host building, on the character and appearance of the conservation area, and on the setting and significance of the adjacent listed building are all considered acceptable.
2. The Heritage Team makes a number of specific recommendation concerning conditions which are set out in detail below.

## DISCUSSION

The Rampant Horse is a listed building and lies within the Needham Market conservation area. The adjacent building to the south-east, no's 1-7 Coddendam Road, is also listed, described in the list description as having origins in the 15<sup>th</sup> C as one 3-cell open hall house, but now divided into 4 separate properties. The heritage issues are the effect of the proposal on the host listed building itself, on the character and appearance of the conservation area and on the setting and significance of the adjacent properties.

I visited this site at pre-application stage and discussed these proposals. The submitted application reflects those pre-application discussions and is acceptable. The greatest change to the host building will take place at the far, north-eastern end of the complex, where an existing single-storey double garage will be removed and replaced with a two-storey extension, designed along similar lines to the existing barn-like rear extension that currently links the garages to the main part of the pub. The garages are of no historic or architectural interest and their removal is not resisted. The new extension will use a barn-like architectural language, broadly in keeping with the character of the existing rear extension, and the overall effect on both the host building and on the character and appearance of the conservation is considered acceptable. There will be some alterations to the timber frame of the rear extension to facilitate access to the new extension and this should be controlled by condition.

Internal changes to the principal building, the pub itself, are limited to the removal and rearrangement of relatively recent internal walls to remodel the kitchen, bar and toilet areas. These changes are not controversial.

In terms of the effect on the setting of the adjacent former hall-house, the heritage team's assessment of the significance of this building suggests that this lies principally in its surviving plan-form, as far as this can be discerned through many later alterations, and the surviving elements of its timber frame, which include smoke-blackened timber and plaster in some places. In terms of its setting, its prominent roadside position, with the front wall rising directly from the back edge of the pavement, contributes to significance but the rear gardens reflect the subdivision into a number of individual properties, which must have happened many years ago. The individual garden plots have developed along different lines involving the addition of fences, sheds and outbuildings and a variety of planting; from the rear there is now little sense of these individual properties having once been in one ownership. The rear gardens thus make a very limited contribution to significance. Given the acceptability of the proposed new extension in terms of the character and appearance of the area, the heritage team considers that the proposals will not harm the significance of 1-7 Coddendam Road as a designated heritage asset.

No objection.

In terms of conditions, it will be important to capture the precise details of the works to be undertaken to the timber frame: no works to the timber frame should take place until written details of those works, including drawings at an appropriate scale showing which timbers are to be retained and which are to be removed, replaced, repaired or altered, have been submitted to and approved by the LPA. Works should thereafter be carried out precisely as approved.

The drawings show a large and prominent vent at the rear of the new extension, which is presumably a kitchen extraction system. I doubt this, as shown on the drawings, will meet the requirements of the Council's environmental health team, so I suggest that, notwithstanding the details submitted, written details, including drawings at a suitable scale, showing the final location, form, materials, appearance, colour and finish of any extraction system should be submitted to and approved by the LPA. The extraction system should thereafter be installed precisely as approved.

External facing and roofing materials for the new works appear broadly acceptable, but a standard materials condition requiring samples to be submitted and approved is appropriate.

New windows are to be installed in several places, but no detailed drawings have been submitted. A standard fenestration condition should be imposed to capture and control these details.

**Name:** William Wall  
**Position:** Heritage & Design Officer